

Technical Information

No. 5633

Edition: 04/08 - subject to change

Substitutes: new

Status: valid



Xenon Short Arc Lamp


XBO[®] 6000 W/HTP XL OFR

■ Product description

The OSRAM XBO[®] 6000 W/HTP XL OFR is a DC-operated lamp, developed with the latest high brightness technology for XBO lamps. The XL lamps, which stands for Xtreme life, are strictly optimized on performance and have an increased warranty up to 50%.

■ Technical data

Order reference	XBO [®] 6000 W/HTP XL OFR	
Rated lamp wattage	W	6000
Rated lamp voltage	V	37
Rated lamp current (=)	A	160
Current control range	A	110 - 165
Ignition voltage	kV _P	40
Min. open circuit voltage for cold / hot ignition	V	85 / 110
Luminous flux	lm	280000
Luminous intensity	cd	40000
Average luminance	cd/cm ²	105000
Luminous area w x h *)	mm	2.0 x 7.5
Electrode gap e (cold)	mm	9
Lamp length (overall) l ₁	mm	max. 433
Lamp length l ₂	mm	max. 382
LCL	a	mm 165
Bulb diameter	d	mm 70
Warranty	h	750
Base	Cathode:	SF _C 30-14
	Anode:	SF _A 30-14

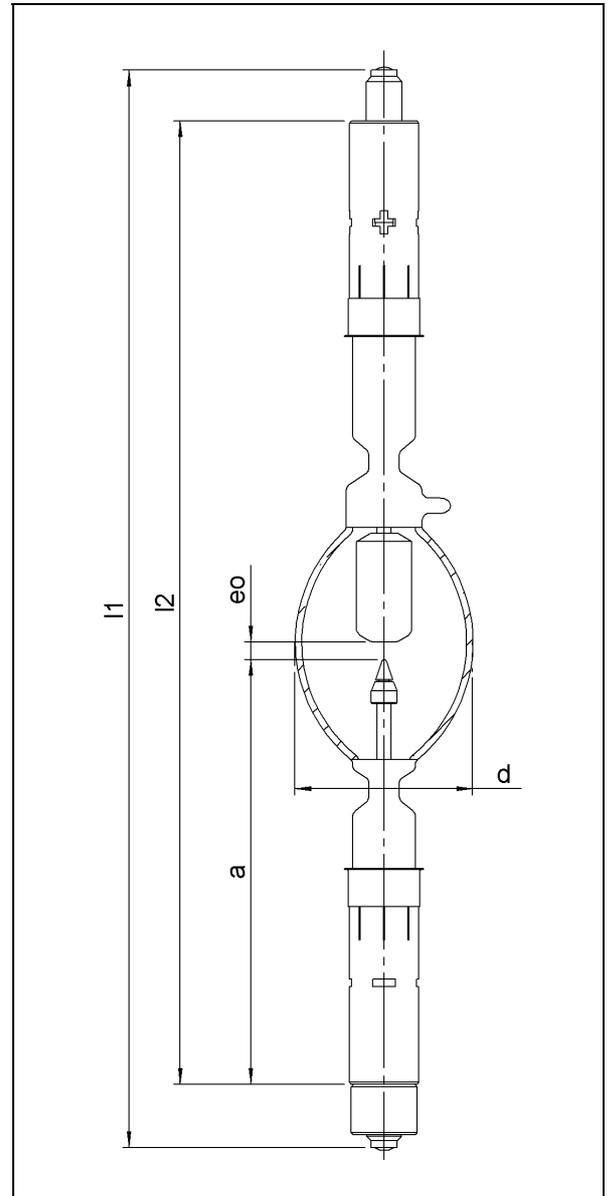

*) w = luminance half width value; h = height of luminance area (corresponds to electrode gap, hot)

■ Lamp operation

Maximum permissible base temperature	230°C
Cooling	forced cooling / fan
Min. air flow velocity around discharge vessel	6 m/s
Magnetic arc stabilization	necessary for horizontal operation
Burning position	s 15 (vertical ± 15° ; anode up) ; p 15 (horizontal ± 15°)